mr.steam's teambaths Technical Specifications

CU Speakers

- Designed for use inside the shower enclosure.
- Complete with two 8 ½" diameter flush-mount two-way speakers, polypropylene cones, and ABS frames with white powder-coated grills.
- Suitable for most sources of audio input.
- cULus Listed

All audio wiring shall be installed in accordance with National Electric Code and local electrical codes.

CAUTION Failure to engage mounting brackets correctly or improper installation may result in a falling object hazard.

NOTE: DO NOT OVER TIGHTEN SCREWS.


IMPORTANT: Do not place speakers in contact with direct water or steam emission. Speakers may be installed in either walls or ceilings.

BOX CONTENTS:

- 2 Speakers
- 1 Installation Instructions

TECHNICAL SPECIFICATIONS:

- 80W peak rated
- 40W RMS
- 8 ohm impedence

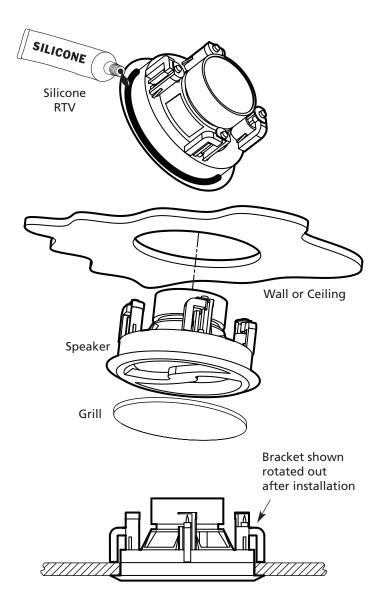

NOTE: FOR ILLUSTRATIVE PURPOSES ONLY.

NOTE: FOR ILLUSTRATIVE PURPOSES ONLY.

IMPORTANT: See Mr.Steam®Installation Instructions, PUR 100401C for details.

Click here to download this manual:

http://mrsteam.com/products/technical-downloads.html